



CCFL Specifications

Key Features

- Sunlight Readable
- 16:9 Wide
- Wide Viewing Angle
- High Contrast Ratio
- LVDS
- Long Lamp Life
- Fast Response Time
- Thin and Light
- 30 CCFL



ALF/ALH3212/3215 (AUO T315XW01)

Model No.	ALF3212/ALF3215	ALH3212/ALH3215
LCD Display	32" WXGA TFT LCD Module	32" WXGA TFT LCD Module
Display Area	697.68 x 392.26mm	697.68 x 392.26mm
Brightness	500 cd/m ² / 1000 cd/m ²	500 cd/m ² / 1000 cd/m ²
Resolution	1366x768 (WXGA)	1366x768 (WXGA)
Contrast Ratio	800 : 1	800 : 1
Pixel Pitch (mm)	0.51075(H) x 0.51075(V)	0.51075(H) x 0.51075(V)
Viewing Angle	+88°~-88°(H), +88°~-88°(V)	+88°~-88°(H), +88°~-88°(V)
Display Colors	16.7M colors	16.7M colors
Response Time	20ms (Typical)	20ms (Typical)
Sync	LVDS	LVDS
Power Consumption	290W	295W
Inverter	BLC-3230A	BLC-3230A
Control Board (Optional)		AD5621GA (Standard)
F / R Control Button		Power Switch, Menu, Select (+,-), Auto
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	760x450x64mm	760x450x64mm
Weight (Net/Gross)	10.06kgs	10.2kgs
Optional	☒ Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
☒ AD5621GA	VGA+Audio
☒ AD5621GD	VGA+DVI
☒ AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☒ AD1501GDV	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
☒ 5 Key	Power Switch, Menu, Select (+,-), Auto
☒ 4 Key	Power Switch, Menu, Select (+,-)

ALF= Panel+Inverter


ALH= Panel+Inverter+Control Board



CCFL Specifications



Outline Dimensions
unit:mm

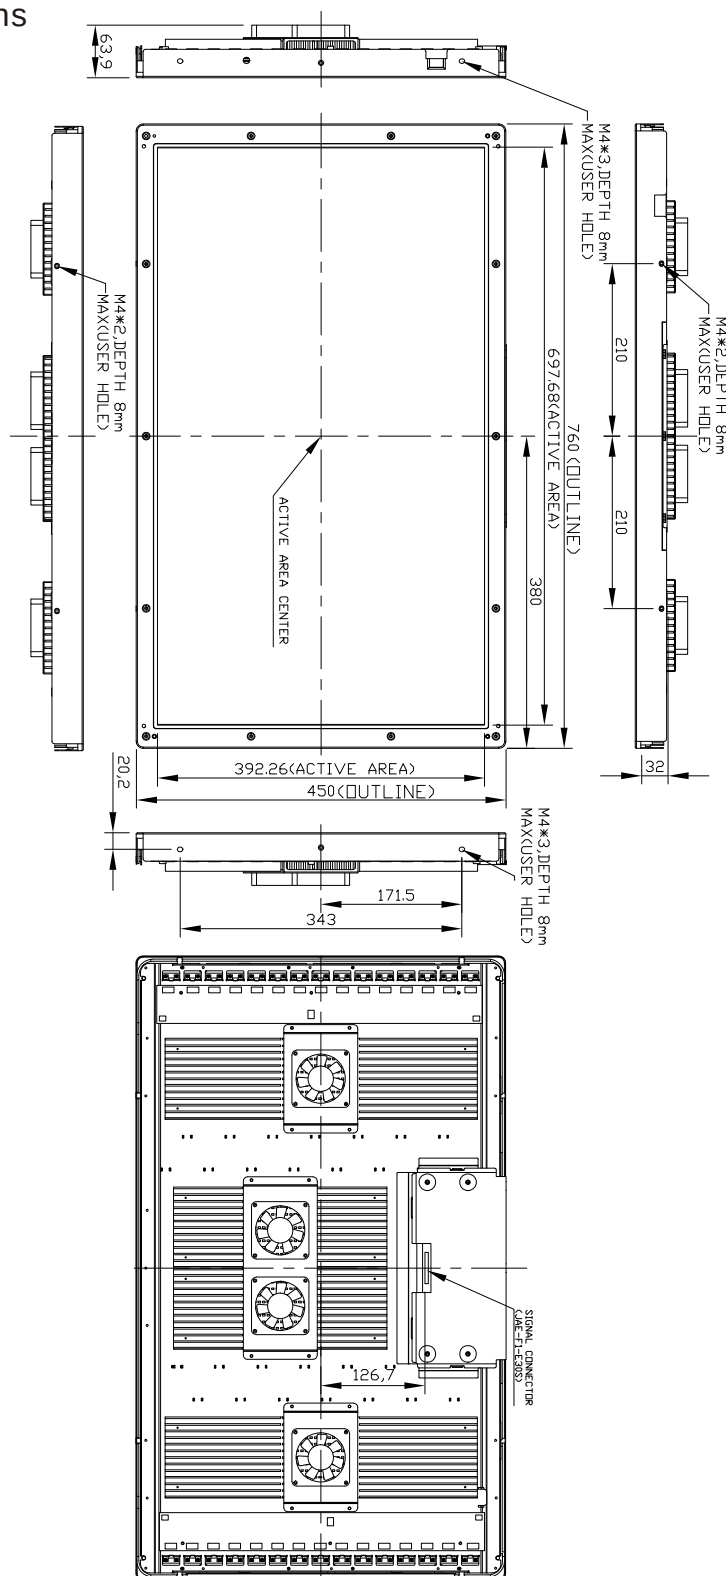

Note :

1.Outline Tolerance : 0.5mm

2.Lamp Connector : JST BHR-03VS-1



Enrich your visual world....