

LED B/L Specifications



Durapixel™

Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy

New coming soon!



DLF/DLH1063 (TOSHIBA LTD104KA1S)



Model No.	DLF1063	DLH1063
LCD Display	10.4" LED Backlight LCD	10.4" LED Backlight LCD
Display Area	210.4 x 157.8mm	210.4 x 157.8mm
Brightness	560 cd/m ²	560 cd/m ²
Resolution	1024 x 768 (XGA)	1024 x 768 (XGA)
Contrast Ratio	500 : 1	500 : 1
Pixel Pitch (mm)	0.0685(H) x 0.0685(V)	0.0685(H) x 0.0685(V)
Viewing Angle	150°(H), 150°(V)	150°(H), 150°(V)
Display Colors	16.2M colors	16.2M colors
Response Time	40ms (Typical)	40ms (Typical)
Sync	LVDS x 1 Channel	LVDS x 1 Channel
Power Consumption	3.5W	8.5W
LED Driving Board	LI D10A	LI D10A
Control Board (Optional)		AD5621GA (Standard)
F / R Control Button		Power Switch, Menu, Select (+,-), Auto
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	238.6x173.2x6mm	238.6x173.2x6mm
Weight	690g	790g
Optional	☒ AOT ☒ Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
☒ AD5621GA	VGA+Audio
☒ AD5621GD	VGA+DVI
☒ AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
☒ 5 Key	Power Switch, Menu, Select (+,-), Auto
☒ 4 Key	Power Switch, Menu, Select (+,-)

DLF= Panel+Driving Board

DLH= Panel+Driving Board+Control Board






Durapixel™

LED B/L Specifications

Outline Dimensions
unit:mm

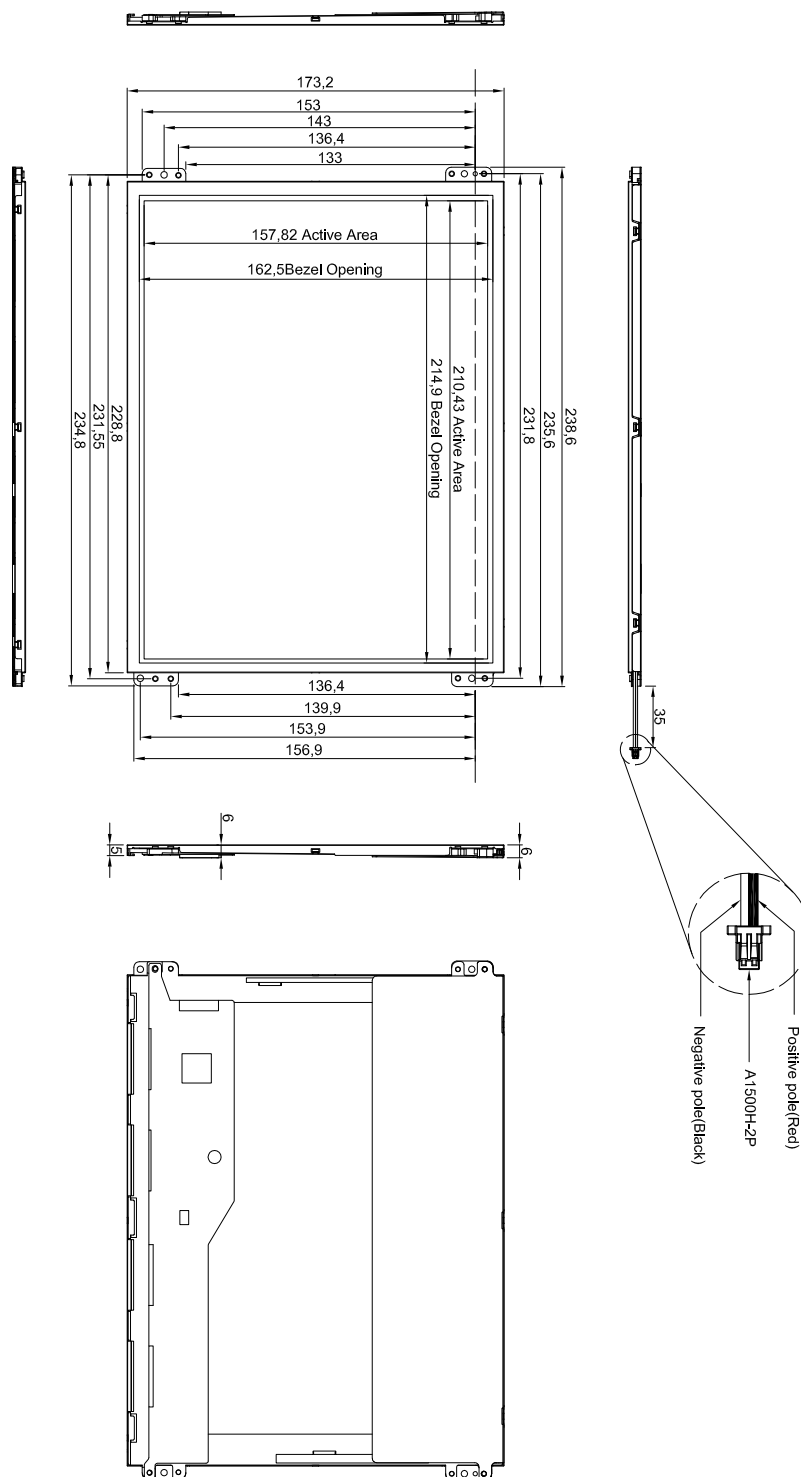

Enrich your visual world....