Platform Specifications

Key Features
- Sunlight Readable
- 16:9 Wide
- Wide Viewing Angle
- High Contrast Ratio
- LVDS
- Long Lamp Life
- Fast Response Time
- Thin and Light
- 30 CCFL

Optional 7H Protective Acrylic Cover

SLO3212/3215 (AUO T315XW01)

Model No.	SLO3212/SLO3215
LCD Display	32" WXGA TFT LCD Module
Display Area	697.68 x 392.26mm
Brightness	500 cd/m^2 / 1000 cd/m^2
Resolution	1366x768 (WXGA)
Contrast Ratio	800 : 1
Pixel Pitch (mm)	0.51075(H) x 0.51075(V)
Viewing Angle	+88°~-88°(H), +88°~-88°(V)
Display Colors	16.7M colors
Response Time	20ms (Typical)
Sync	LVDS
Power Consumption	295W
Inverter	BLC-3230A
Control Board (Optional)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	810x500x109.85mm
Weight	26.5kgs /3 4.95kgs
Optional	☑ Touch Screen

Specifications are subject tochange without notice. All brands or productnames are trademarks orregistered trademarks of theirrespective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
☑ **AD5621GA**	VGA+Audio
☑ **AD5621GD**	VGA+DVI
☑ **AD5766GDVA**	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☑ **AD1501GDV**	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
☑ **5 Key**	Power Switch, Menu, Select (+,-), Auto
☑ **4 Key**	Power Switch, Menu, Select (+,-)

SLO= Open Frame
SLD= Industrial Casing

Enrich your visual world....

Platform Specifications
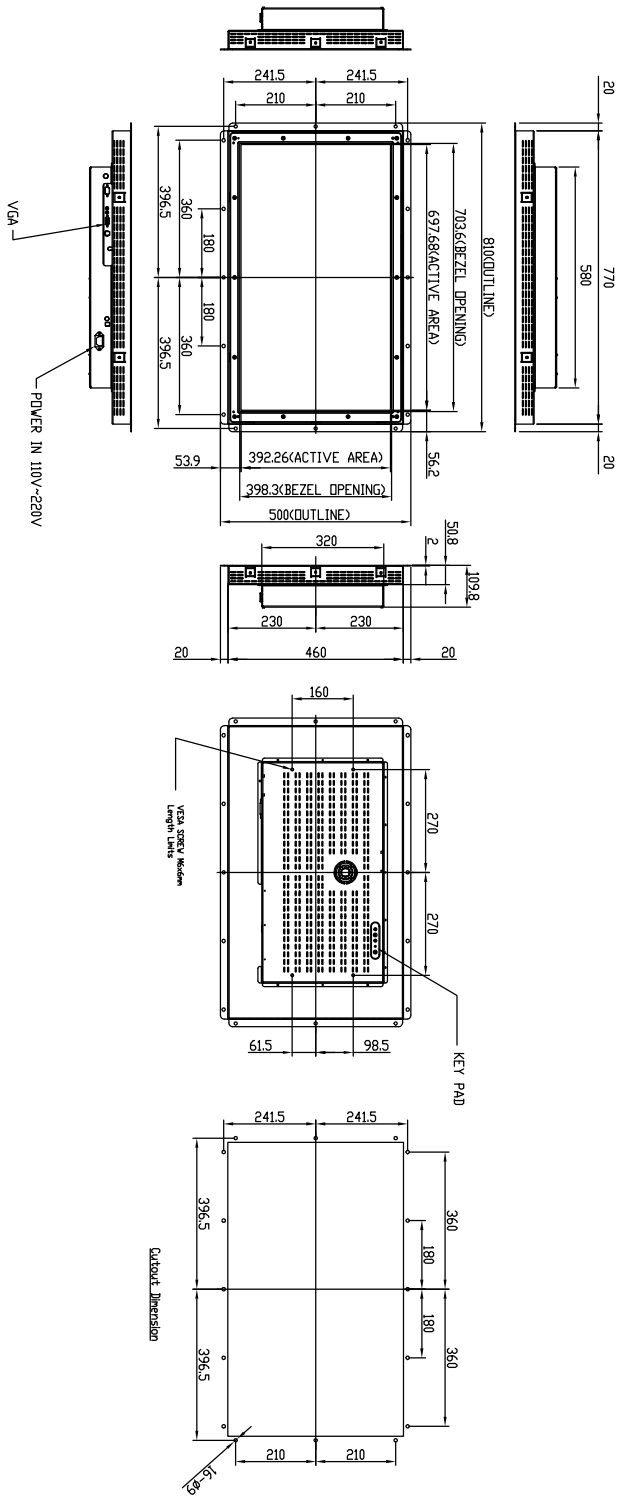
Outline Dimensions
unit:mm