

Platform Specifications



Platform

Key Features

Sunlight Readable
16:9 Wide
Wide Viewing Angle
High Contrast Ratio
LVDS
Long Lamp Life
Fast Response Time
Thin and Light
12 CCFL



SLO/SLD2025 (AUO T200XW02)


Model No.	SLO2025	SLD2025
LCD Display	20.1" Wide TFT LCD Module	20.1" Wide TFT LCD Module
Display Area	443.61 x 249.41 mm	443.61 x 249.41 mm
Brightness	1000 cd/m ²	1000 cd/m ²
Resolution	1366x768 (WXGA)	1366x768 (WXGA)
Contrast Ratio	800 : 1	800 : 1
Pixel Pitch (mm)	0.325(H) x 0.325(V)	0.325(H) x 0.325(V)
Viewing Angle	+85 ~-85 (H), +85 ~-85 (V)	+85 ~-85 (H), +85 ~-85 (V)
Display Colors	16.7M colors	16.7M colors
Response Time	16ms (Typical)	16ms (Typical)
Sync	LVDS	LVDS
Power Consumption	60.2W	60.2W
Inverter	LI 1220A	LI 1220A
Control Board (Optional)	AD5621GA (Standard)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....	
Dimensions (WxHxD)	552x326.5x60mm	552x326.5x61.6mm
Weight	4.73kgs	5.61kgs
Optional	Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
AD5621GA	VGA+Audio
AD5621GD	VGA+DVI
AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
AD1501GDV	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
5 Key	Power Switch, Menu, Select (+,-), Auto
4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame

SLD= Industrial Casing




Platform Specifications



Platform

SLO2025 Outline Dimensions unit:mm

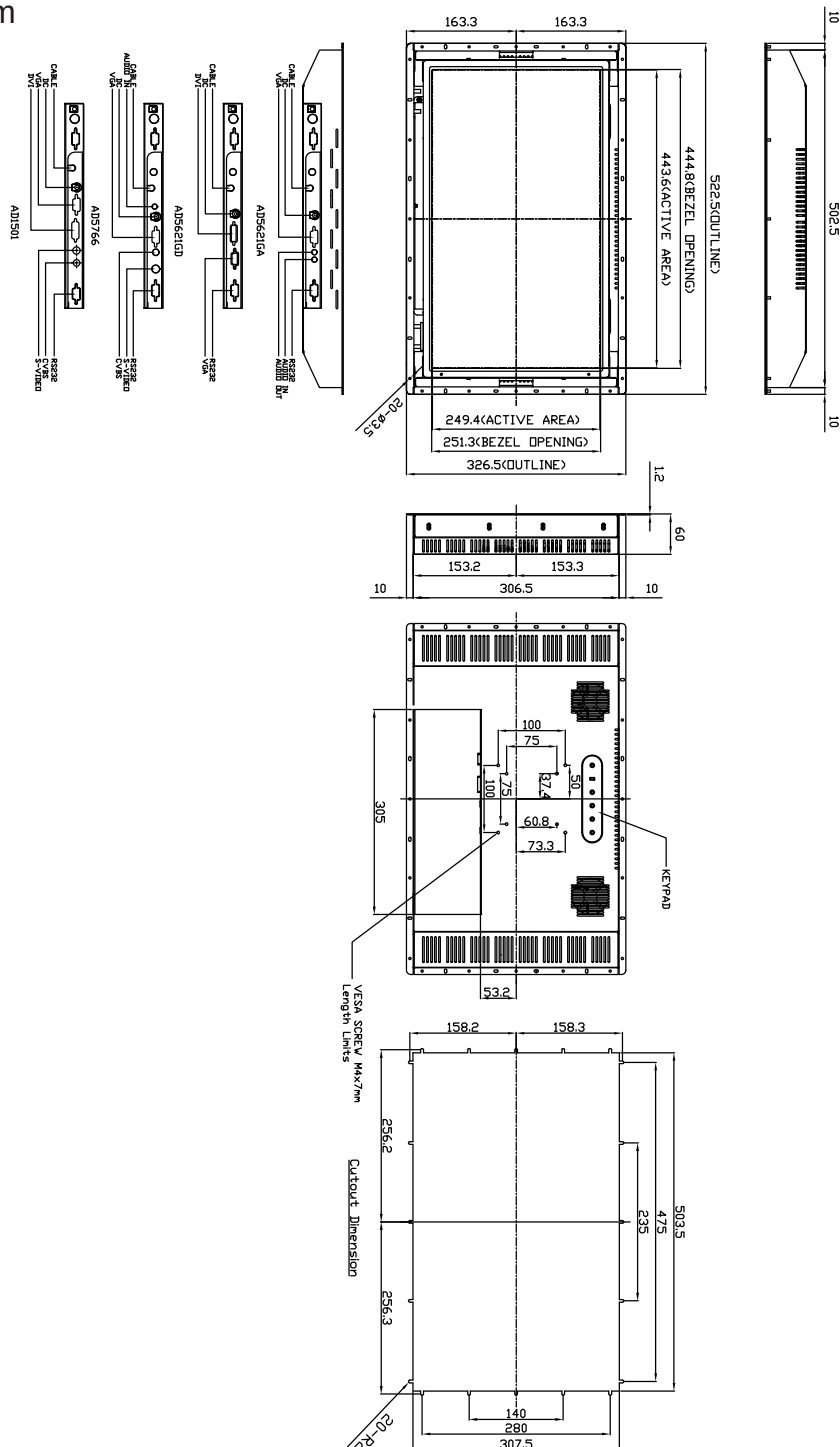

- Note:1.OSD membrane can be on front or rear cover.
 2.4 different AD boards can be selectable.
 3.Light sensor and VR are optional function.
 4.Temper glass and touch screen can be installed.




Enrich your visual world....



Platform

Platform Specifications

SLD2025 Outline Dimensions
unit:mm

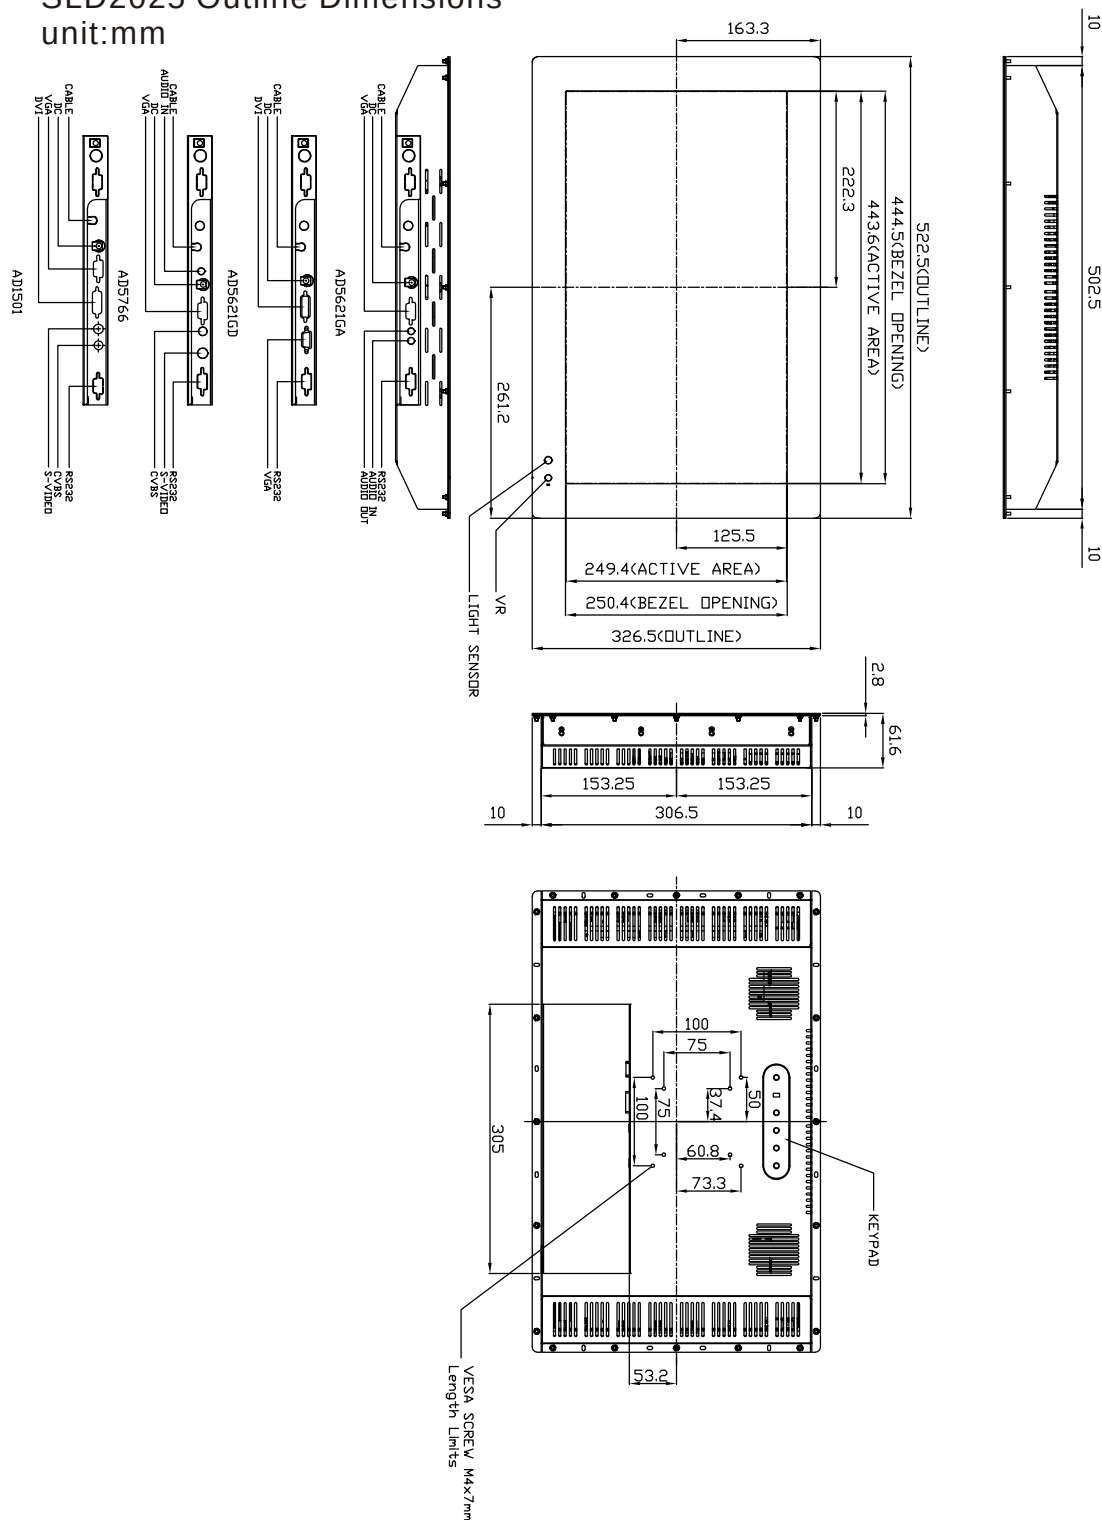

Enrich your visual world....