

Platform Specifications



Platform

Key Features

- Sunlight Readable
- High Contrast Ratio
- LVDS
- Long Lamp Life
- Fast Response Time
- Thin and Light
- 12 CCFL



SLD1550 (CMO G150X1-L02)

Model No.	SLD1550
LCD Display	15" TFT LCD Module
Display Area	304.128 x 228.096 mm
Brightness	2200 cd/m ²
Resolution	1024x768 (XGA)
Contrast Ratio	700 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Viewing Angle	+80°~-80°(H), +80°~-80°(V)
Display Colors	16.2M colors
Response Time	25ms (Typical)
Sync	LVDS
Power Consumption	47W
Inverter	LI 1215A
Control Board (Optional)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	389x325x61.6mm
Weight	4.49kgs
Optional	☒ AOT ☒ Touch Screen

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
☒ AD5621GA	VGA+Audio
☒ AD5621GD	VGA+DVI
☒ AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☒ AD1501GDV	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
☒ 5 Key	Power Switch, Menu, Select (+,-), Auto
☒ 4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame

SLD= Industrial Casing




Platform Specifications



Platform

Outline Dimensions unit:mm

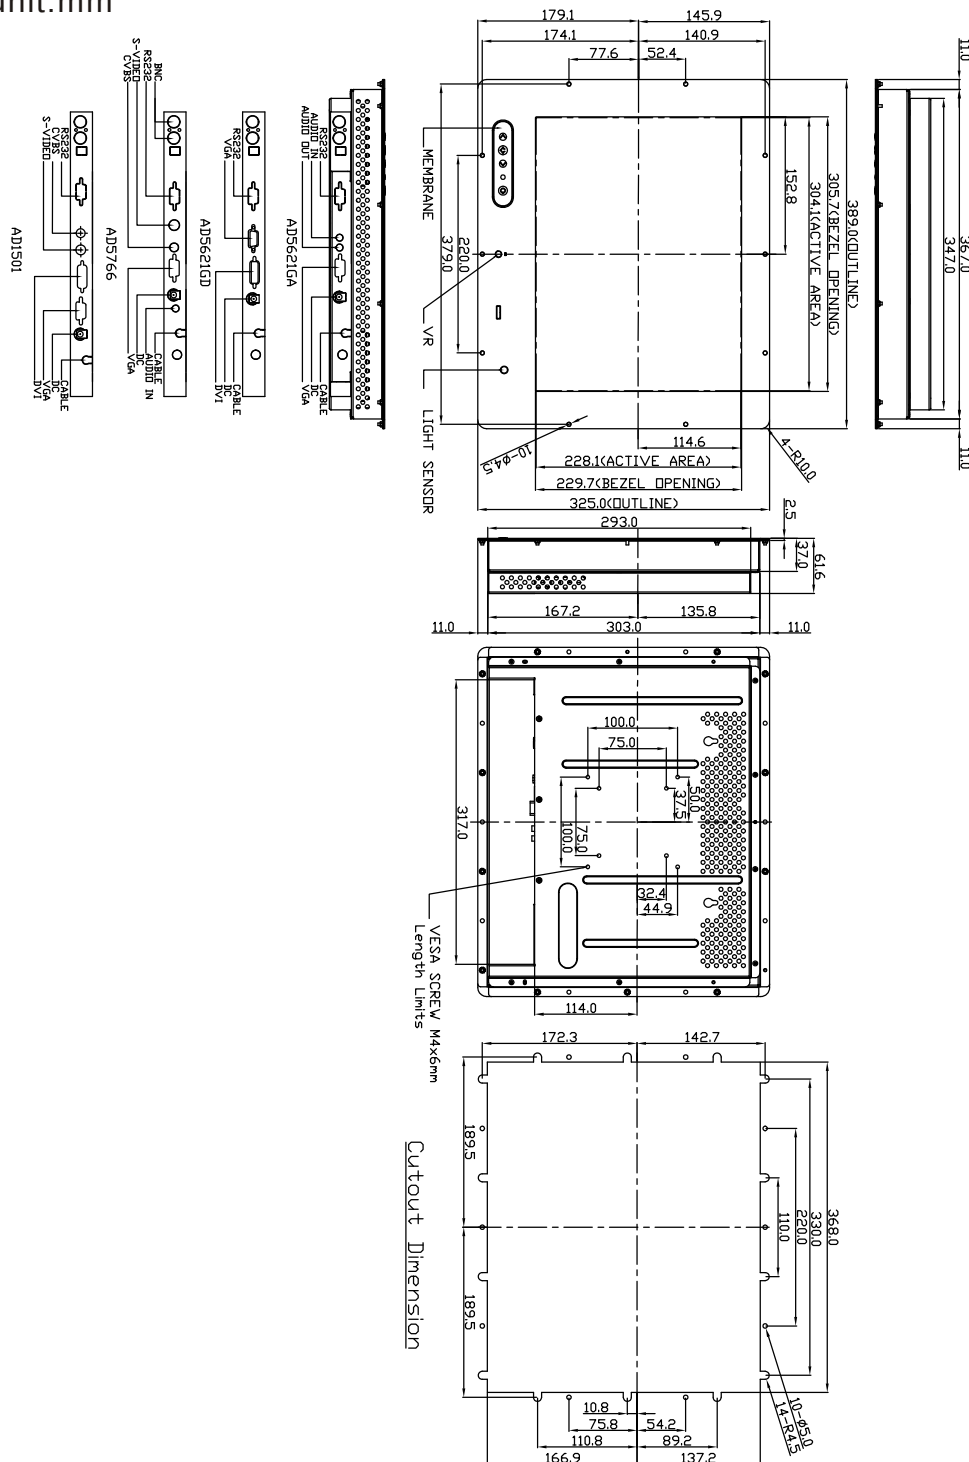

- Note: 1. OSD membrane can be on front or rear cover.
 2. 4 different AD boards can be selectable.
 3. Light sensor and VR are optional function.
 4. Temper glass and touch screen can be installed.



Enrich your visual world....