

# Platform Specifications



Platform

## Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



## SLD1555 (CMO G150X1-L02)

|                                 |                                                             |
|---------------------------------|-------------------------------------------------------------|
| <b>Model No.</b>                | SLD1555                                                     |
| <b>LCD Display</b>              | 15" LED Backlight LCD                                       |
| <b>Display Area</b>             | 304.128 x 228.096mm                                         |
| <b>Brightness</b>               | 1000 cd/m <sup>2</sup>                                      |
| <b>Resolution</b>               | 1024 x 768 (XGA)                                            |
| <b>Contrast Ratio</b>           | 700 : 1                                                     |
| <b>Pixel Pitch (mm)</b>         | 0.297(H) x 0.297(V)                                         |
| <b>Viewing Angle</b>            | 160°(H), 160°(V)                                            |
| <b>Display Colors</b>           | 16,194,277 colors                                           |
| <b>Response Time</b>            | 25ms (Typical)                                              |
| <b>Sync</b>                     | LVDS x 1 Channel                                            |
| <b>Power Consumption</b>        | 30W                                                         |
| <b>LED Driving Board</b>        | LI D15A                                                     |
| <b>Control Board (Optional)</b> | AD5621GA (Standard)                                         |
| <b>F / R Control Button</b>     | Power Switch, Menu, Select (+,-), Auto                      |
| <b>OSD Menu</b>                 | Brightness, Contrast, H/V Position, Color, Phase, Clock.... |
| <b>Dimensions (WxHxD)</b>       | 389x325x61.6mm                                              |
| <b>Weight</b>                   | 4.62kgs                                                     |
| <b>Optional</b>                 | <input checked="" type="checkbox"/> Touch Screen            |

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

|                                                       |                                                   |
|-------------------------------------------------------|---------------------------------------------------|
| <b>Control Board (Optional)</b>                       | AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV            |
| <input checked="" type="checkbox"/> <b>AD5621GA</b>   | VGA+Audio                                         |
| <input checked="" type="checkbox"/> <b>AD5621GD</b>   | VGA+DVI                                           |
| <input checked="" type="checkbox"/> <b>AD5766GDVA</b> | VGA+CVBS+S-Video+Audio (Optional DVI / Component) |
| <input checked="" type="checkbox"/> <b>AD1501GDV</b>  | VGA+DVI+S-Video                                   |
| <b>F / R Control Button</b>                           | 5 Key / 4 Key (Optional)                          |
| <input checked="" type="checkbox"/> <b>5 Key</b>      | Power Switch, Menu, Select (+,-), Auto            |
| <input checked="" type="checkbox"/> <b>4 Key</b>      | Power Switch, Menu, Select (+,-)                  |

SLO= Open Frame

SLD= Industrial Casing




# Platform Specifications



Platform

## Outline Dimensions unit:mm

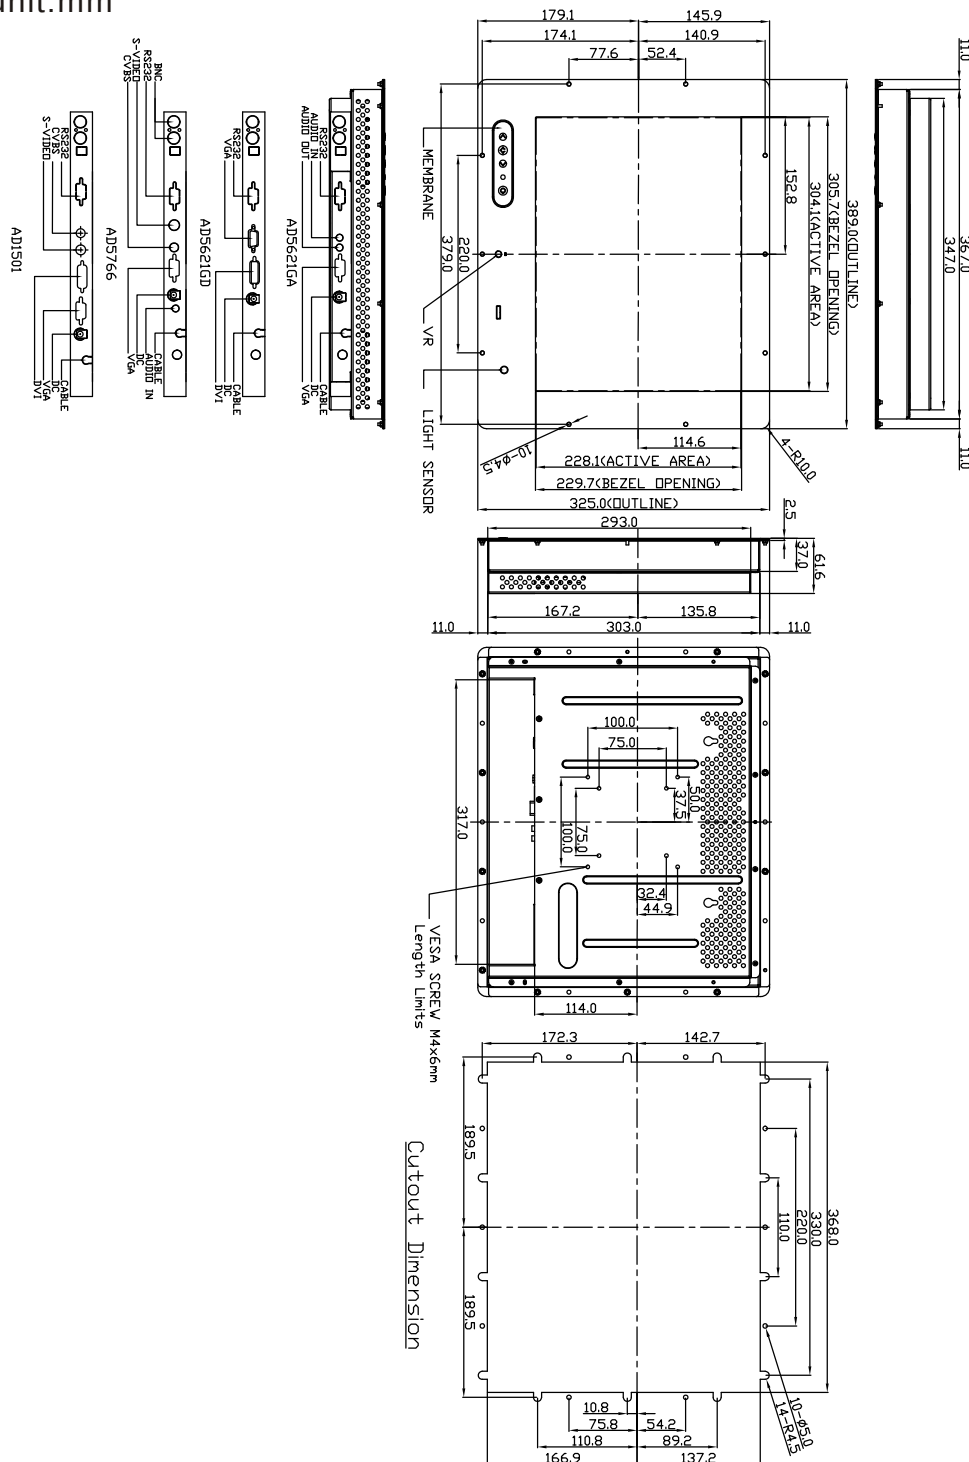

- Note: 1. OSD membrane can be on front or rear cover.  
 2. 4 different AD boards can be selectable.  
 3. Light sensor and VR are optional function.  
 4. Temper glass and touch screen can be installed.



Enrich your visual world....